



Three phase capacitors: 250 V, 50 Hz, Oval

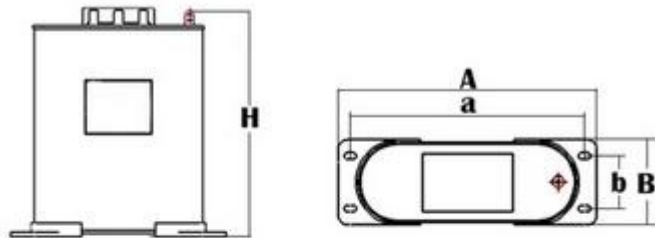

Pattem D

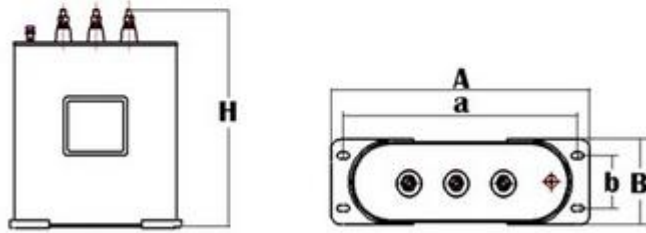

Pattem E

Type	Rated Voltage	Rated Capacitance	Static Capacity	Rated Current (A)	Dimension A*B*H/a*b(mm)	Terminal type
	(V)	(KVAR)	(uF)			
BKMJ0.25-5-3	250	5	255	11.5	195*72*186/179*58	D
BKMJ0.25-10-3	250	10	510	23.1	195*72*226/179*58	
BKMJ0.25-15-3	250	15	764	34.6	230*82*240/215*66	E
BKMJ0.25-18-3	250	18	918	41.5	230*82*240/215*66	

Technical data:

Temperature category: -25°C-50°C

Discharge resistors: 75 V/ 3 min

Dielectric: MKP - metallized PP film

Design: dry type, non PCB

Tandard: IEC 60831